
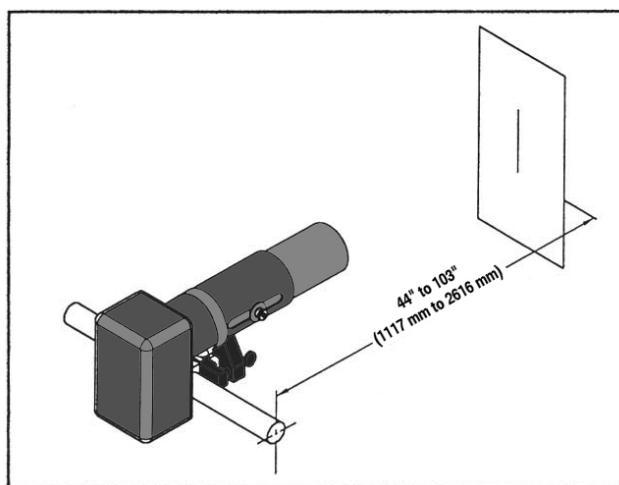


ML09010 INCANDESCENT LINE PROJECTOR

Projects a thin, sharp and uniform line of white light on a still or moving surface

FEATURES

- **ACCURACY:** The ML09010 projects a fine, white line (1/16" wide), which is easy to see. This sharp, bright line helps ensure that the operator can properly align materials.
- **EASY TO USE:** The projector's easy adjustment and simple mounting system makes it ideal for tread centering, sidewall or ply alignment, or any application needing one or more guidelines.
- **CYCLE CAPACITY:** The ML09010 projector can be turned on and off, helping to conserve the projector lamp bulb's life.
- **PROJECTOR LAMP:** The ML09010 projector ships with our ML09031 projector lamp bulb holder, installed, but the ML09020 projector lamp bulb must be purchased separately. Both the bulb and holder are also sold separately as replacements, if needed. (See reverse side for details.)

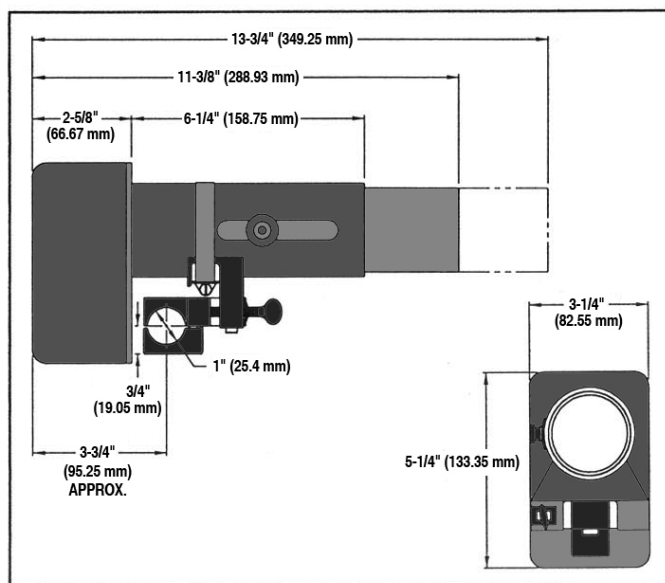

To Focus: Loosen nut on outer tube of projector and slide the tube in and out until the line is sharp, then retighten nut.

To Adjust: Use fingertip adjustment on mounting bracket -- allows line adjustment in all planes.

SPECIFICATIONS

Operating Voltage	7.5 Volts, AC or DC
Operating Current	2.7 Amps
Focusing Distance Range	44" to 103" (1117 to 2616 mm)
Weight	2 lbs, 13 oz (1.3 kg)

MOUNTING DISTANCE


Distance to Target	Line Length
48" (1220 mm)	7" (180 mm)
72" (1830 mm)	11" (280 mm)
96" (2440 mm)	15" (380 mm)
120" (3050 mm)	19" (480 mm)

(See reverse side.)

Incandescent-LP-06-Q

ML09020 INCANDESCENT LINE PROJECTOR LAMP

Used with Everhard's ML09010 Incandescent Line Projector

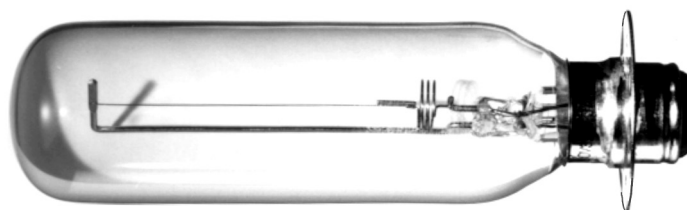

ML09031 SOCKET ASSEMBLY

(Included with ML09010 Incandescent Line Projector)



SPECIFICATIONS

Voltage	10 Volts
Operating Voltage	7.5 Volts
Current	3.5 Amps
Weight	0.06 lbs

MODEL #	DESCRIPTION	WEIGHT
ML09010	Incandescent Line Projector with Socket Assembly	3.000 lbs
ML09020	Projector Lamp for the ML09010 Incandescent Line Projector	0.060 lbs
ML09031	Replacement Socket Assembly with Brass Contacts and Ceramic Insulator	0.240 lbs

Note Before Ordering:

The **ML09010** Incandescent Line Projector ships with the **ML09031** Socket Assembly only. The **ML09020** lamp is sold separately.

Replacement Parts:

ML09020 lamp (recommended)

- Has standard size flange
- Serves as a replacement for Fairway #68

ML09031 Socket Assembly

- Serves as a replacement for Fairway #7500

Review the Installation/Operation Instructions (packaged with the product) for the **ML09010** Incandescent Line Projector before use.